
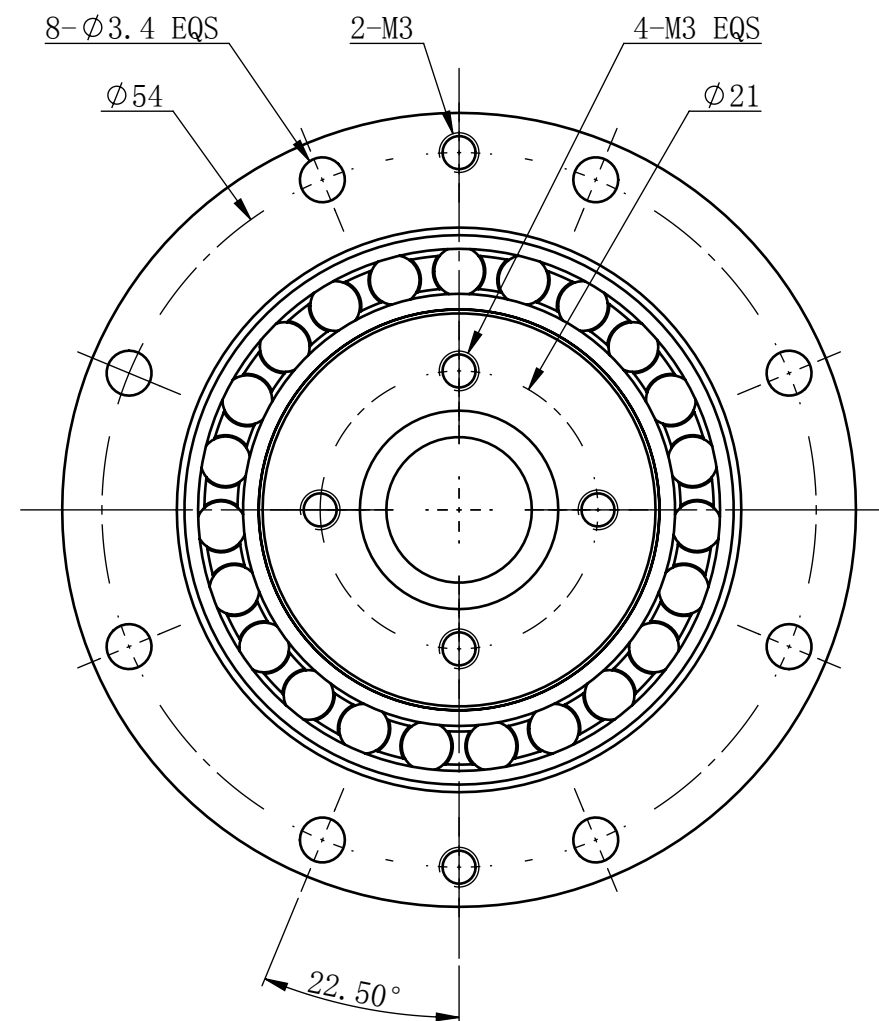
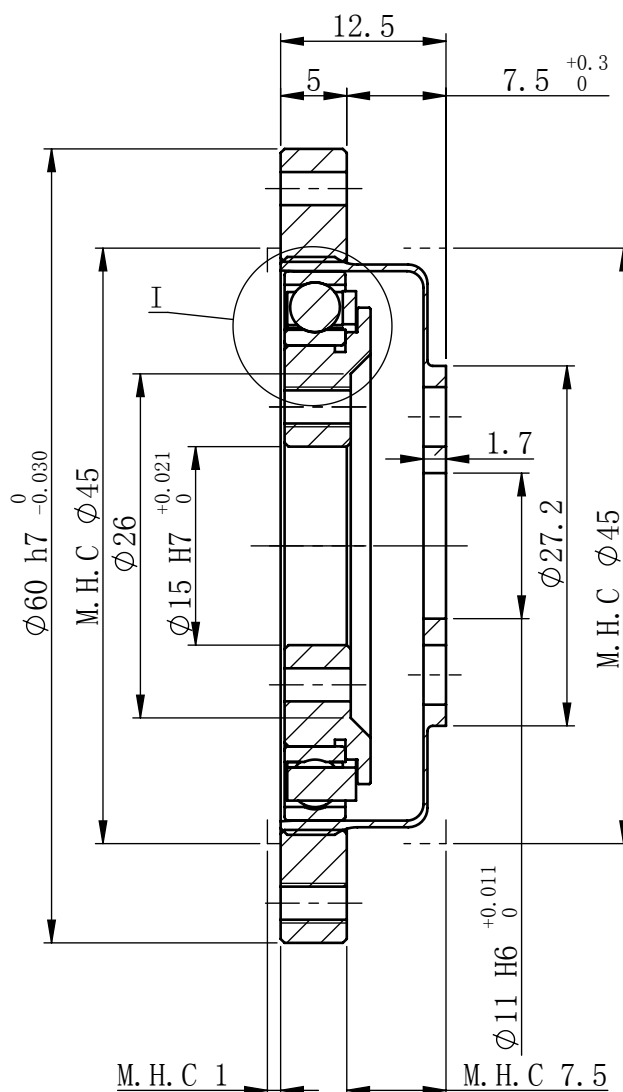
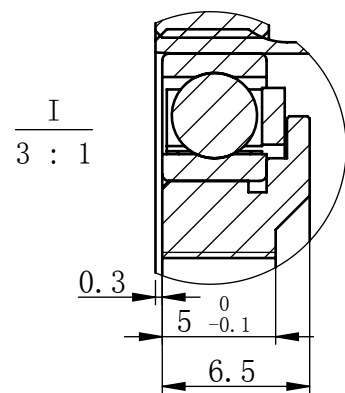


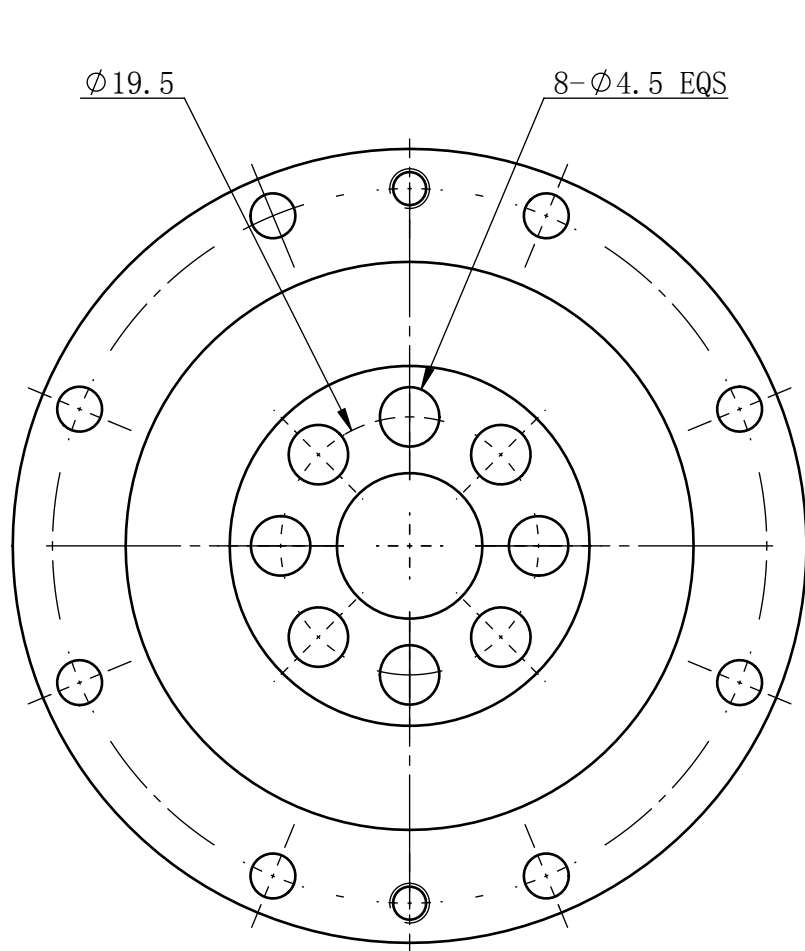

M.H.C :最小安装避让空间 MINIMUM HOUSING CLEARANCE

减速机型号 Model	减速比 Reduc-tion ratio	输入2000r/min 时的额定转矩 Rated torque at input 2000r/min		启动停止容许峰值扭矩 Peak torque at start/stop		平均负载转矩容许最大值 Permissible max. value of ave.load torque		瞬间容许最大转矩 Instantaneous permissible max. torque		容许最高输入转速 Permissible max. input rotational speed(r/min)	容许平均输入转速 Permissible ave. input rotational speed(r/min)	齿隙 Backlash	重量 Weight
		Nm	kgfm	Nm	kgfm	Nm	kgfm	Nm	kgfm	润滑脂 Grease lubricant	润滑脂 Grease lubricant	arcsec	kg
FCD-17-50-C	50	11	1.1	23	2.3	18	1.8	48	4.9	7300	3500	20	0.1
FCD-17-80-C	80	15	1.5	29	3.0	19	1.9	61	6.2	7300	3500	13	0.1
FCD-17-100-C	100	16	1.6	36	3.7	27	2.8	71	7.2	7300	3500	10	0.1
FCD-17-120-C	120	16	1.6	37	3.8	27	2.8	71	7.2	7300	3500	8	0.1

	图幅 SHEET	页码 PAGE	比例 RATIO	版本 VERSION
	A3	1/1	1.75:1	V1.0

四川天链机器人股份有限公司
Sichuan TLIBOT Co.,Ltd

组件型-超薄杯型谐波减速机