
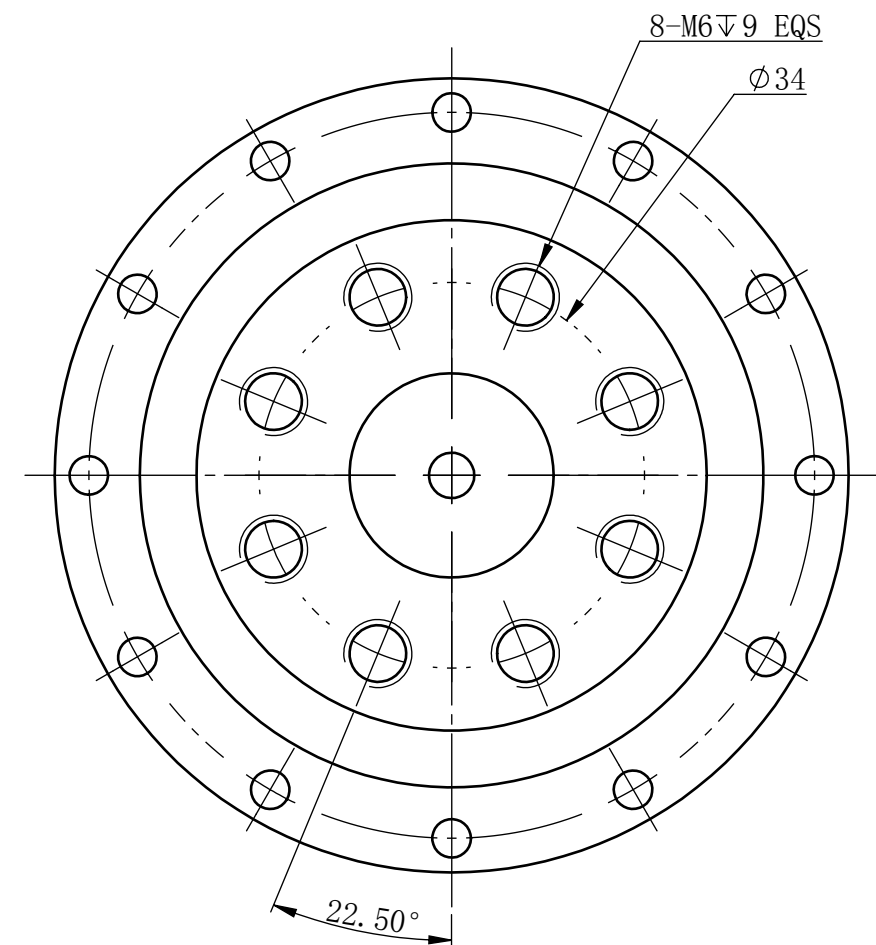
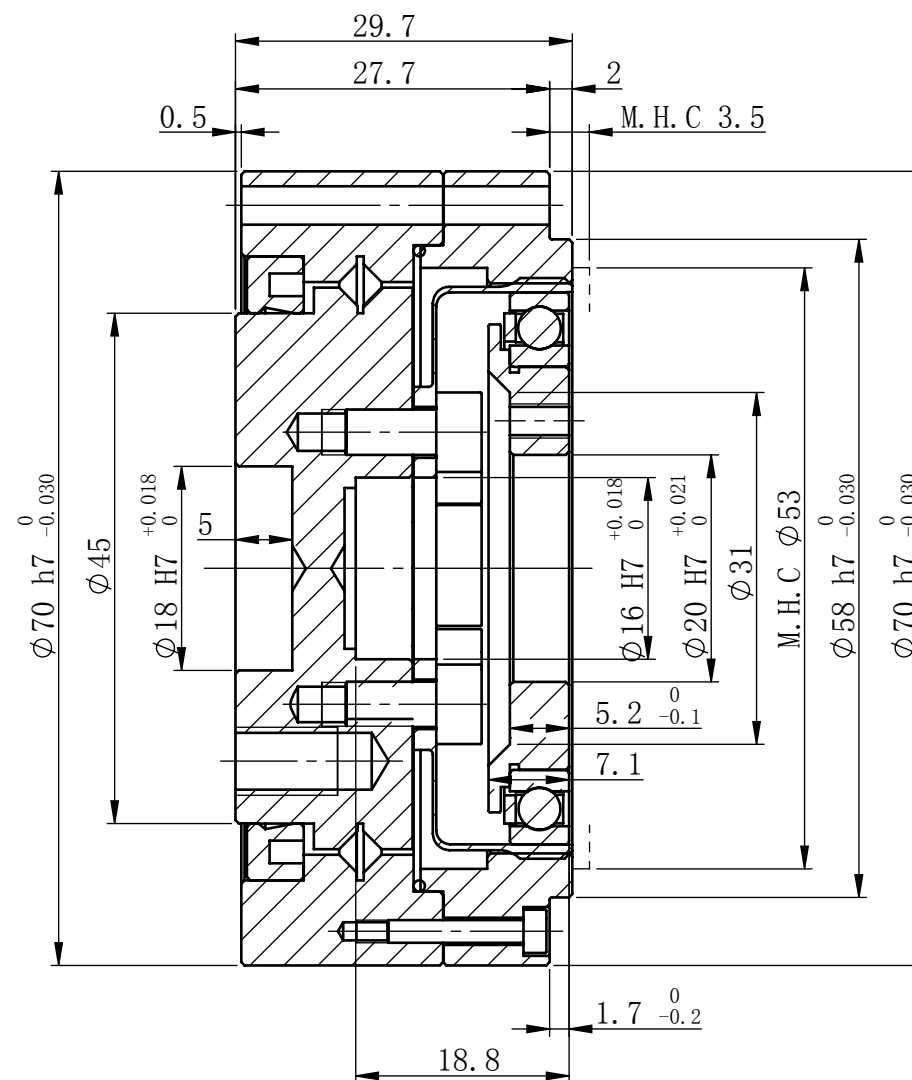


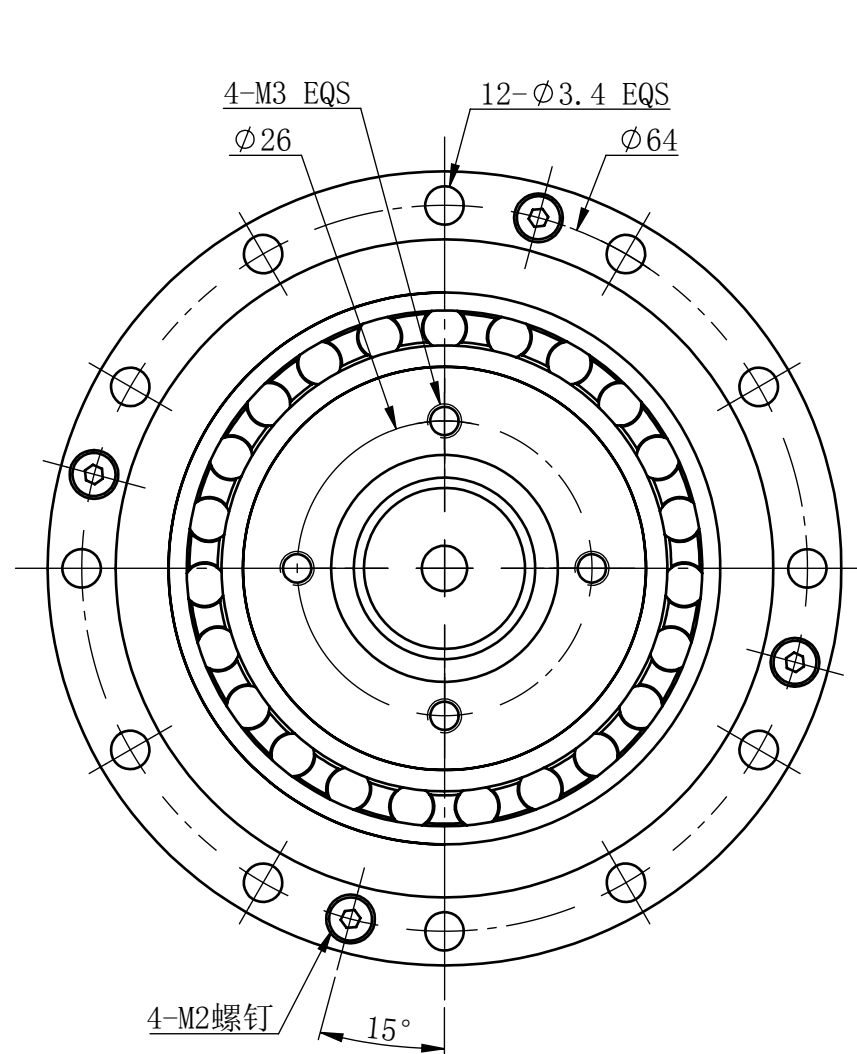

M.H.C:最小安装避让空间 MINIMUM HOUSING CLEARANCE

减速机型号 Model	减速比 Reduction ratio	输入2000r/min时的额定转矩 Rated torque at input 2000r/min		启动停止容许峰值扭矩 Peak torque at start/stop		平均负载转矩容许最大值 Permissible max. value of ave.load torque		瞬间容许最大转矩 Instantaneous permissible max. torque		容许最高输入转速 Permissible max. input rotational speed(r/min)	容许平均输入转速 Permissible ave. input rotational speed(r/min)	齿隙 Backlash	重量 Weight
		Nm	kgfm	Nm	kgfm	Nm	kgfm	Nm	kgfm	润滑脂 Grease lubricant	润滑脂 Grease lubricant	arcsec	kg
FCD-20-50-AJ	50	17	1.7	39	4.0	24	2.4	69	7.0	6500	3500	17	0.65
FCD-20-80-AJ	80	24	2.4	51	5.2	33	3.4	89	9.1	6500	3500	11	0.65
FCD-20-100-AJ	100	27	2.8	57	5.8	33	3.4	93	9.5	6500	3500	9	0.65
FCD-20-120-AJ	120	27	2.8	60	6.1	34	3.5	93	9.5	6500	3500	8	0.65
FCD-20-160-AJ	160	27	2.8	64	6.5	33	3.4	93	9.5	6500	3500	6	0.65

图幅 SHEET	页码 PAGE	比例 RATIO	版本 VERSION
A3	1/1	1.5:1	V1.0
四川天链机器人股份有限公司 Sichuan TLIBOT Co.,Ltd			
组合型-超薄小径杯型谐波减速机			