


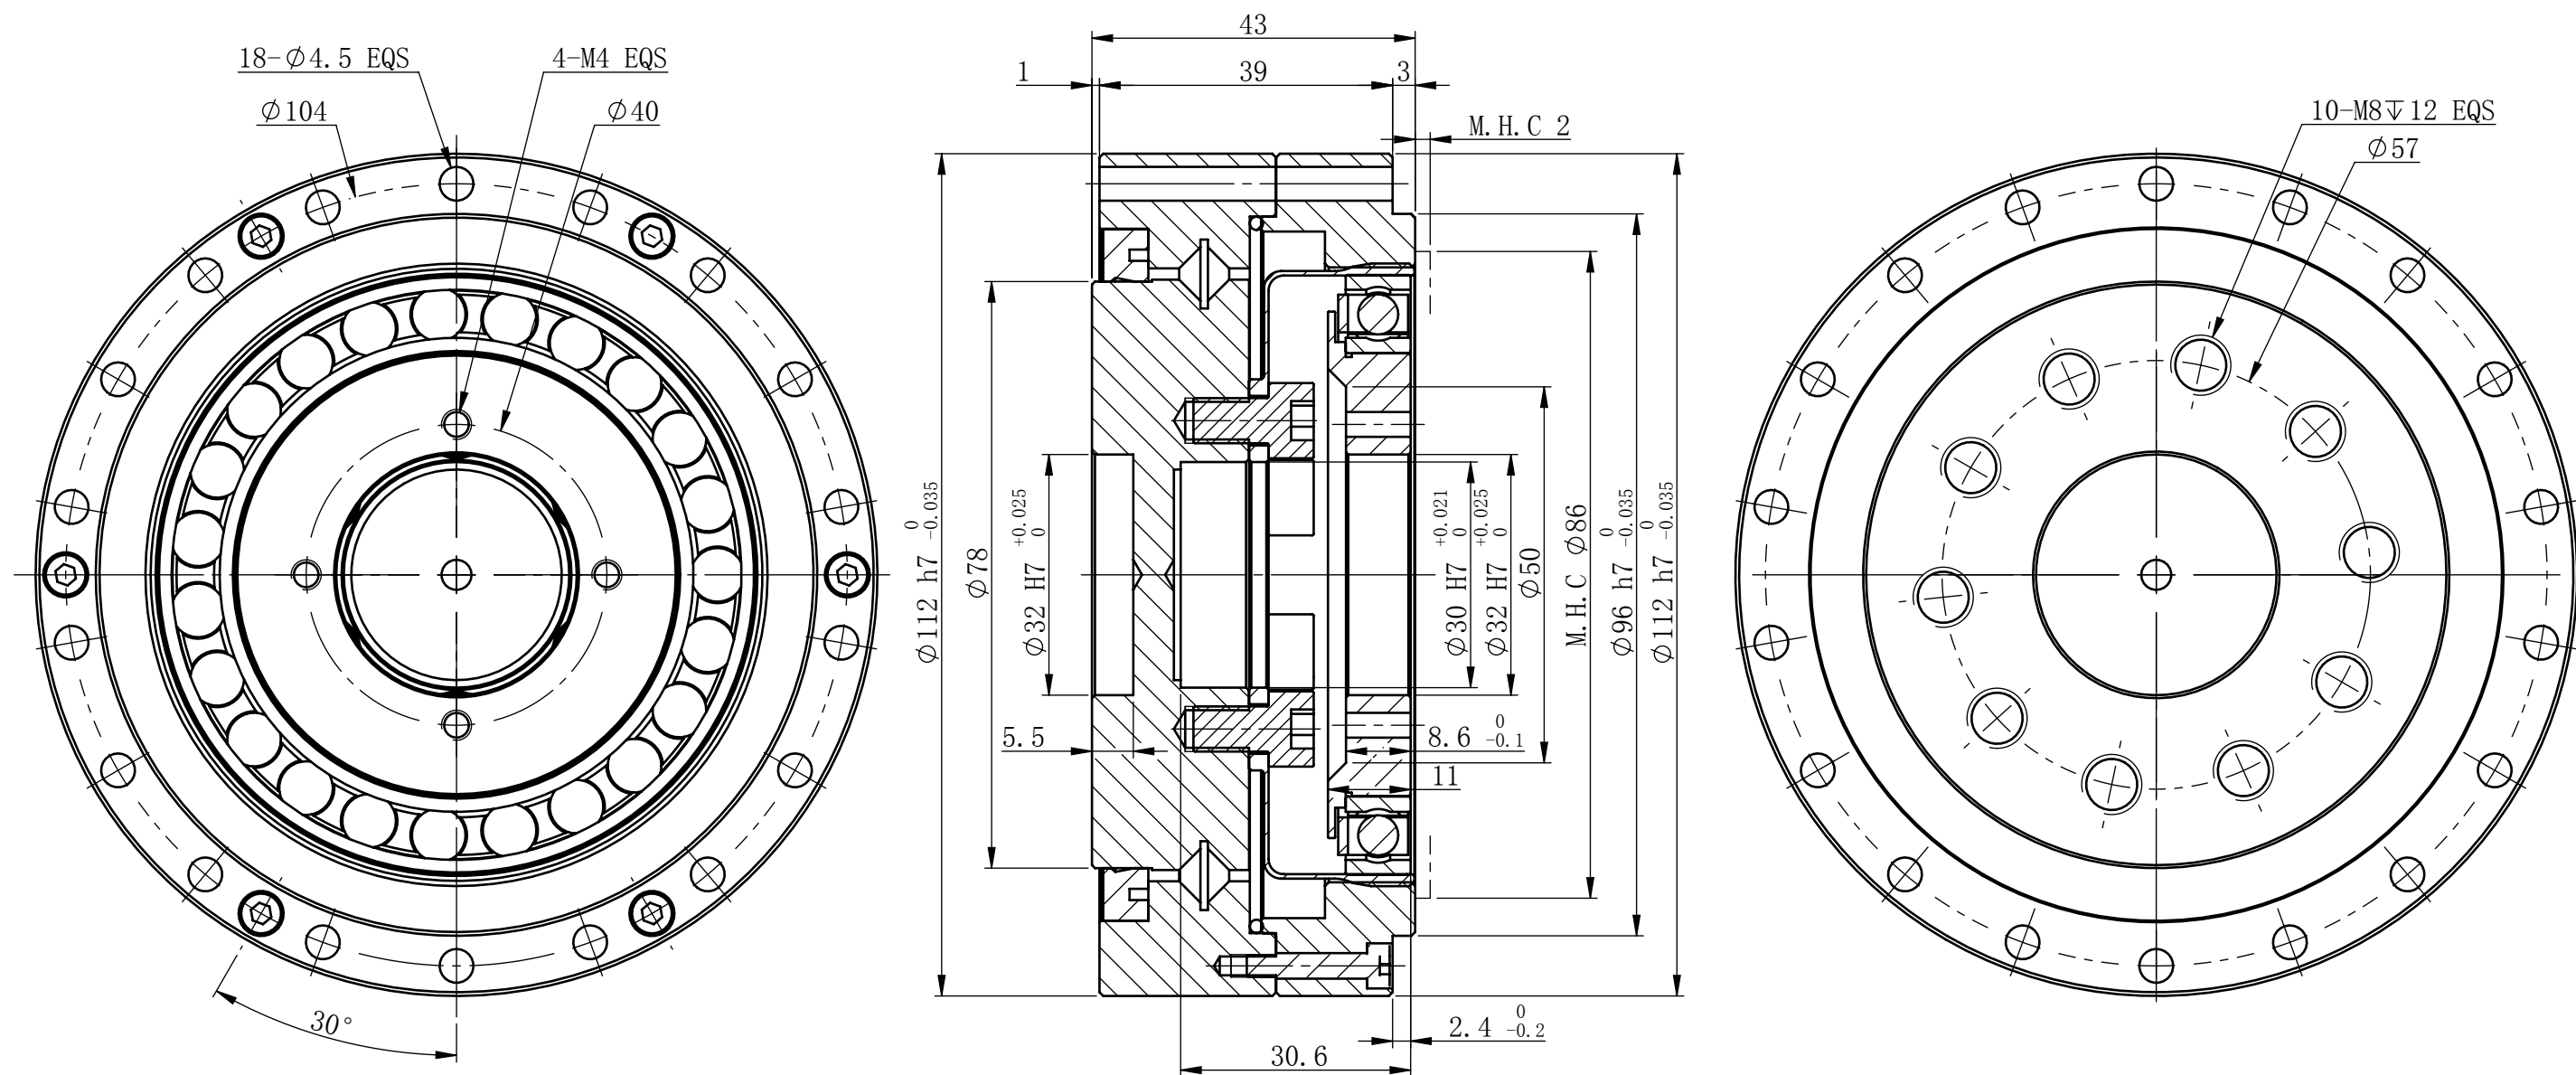

M.H.C :最小安装避让空间 MINIMUM HOUSING CLEARANCE

减速机型号 Model	减速比 Reduc-tion ratio	输入2000r/min时的额定转矩 Rated torque at input 2000r/min		启动停止容许峰值扭矩 Peak torque at start/stop		平均负载转矩容许最大值 Permissible max. value of ave.load torque		瞬间容许最大转矩 Instantaneous permissible max. torque		容许最高输入转速 Permissible max. input rotational speed(r/min)	容许平均输入转速 Permissible ave. input rotational speed(r/min)	齿隙 Backlash	重量 Weight
		Nm	kgfm	Nm	kgfm	Nm	kgfm	Nm	kgfm	润滑脂 Grease lubricant	润滑脂 Grease lubricant	arcsec	kg
FCD-32-50-AJ	50	52	5.3	147	15	74	7.6	268	27	4800	3500	14	2.4
FCD-32-80-AJ	80	83	8.5	213	22	117	12	398	41	4800	3500	9	2.4
FCD-32-100-AJ	100	94	9.6	233	24	149	15	420	43	4800	3500	7	2.4
FCD-32-120-AJ	120	94	9.6	247	25	149	15	445	45	4800	3500	6	2.4
FCD-32-160-AJ	160	94	9.6	261	27	149	15	445	45	4800	3500	4	2.4

	图幅 SHEET	页码 PAGE	比例 RATIO	版本 VERSION
	A3	1/1	1.1:1	V1.0

天链机器人

四川天链机器人股份有限公司
Sichuan TLIBOT Co.,Ltd

组合型-超薄小径杯型谐波减速机