
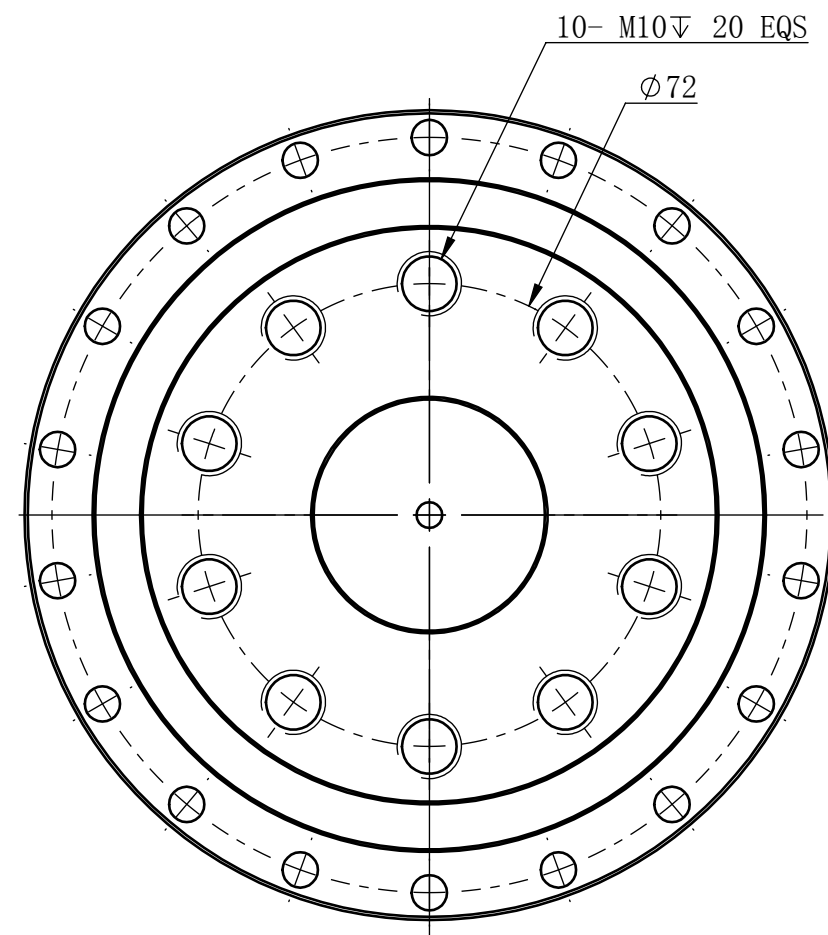
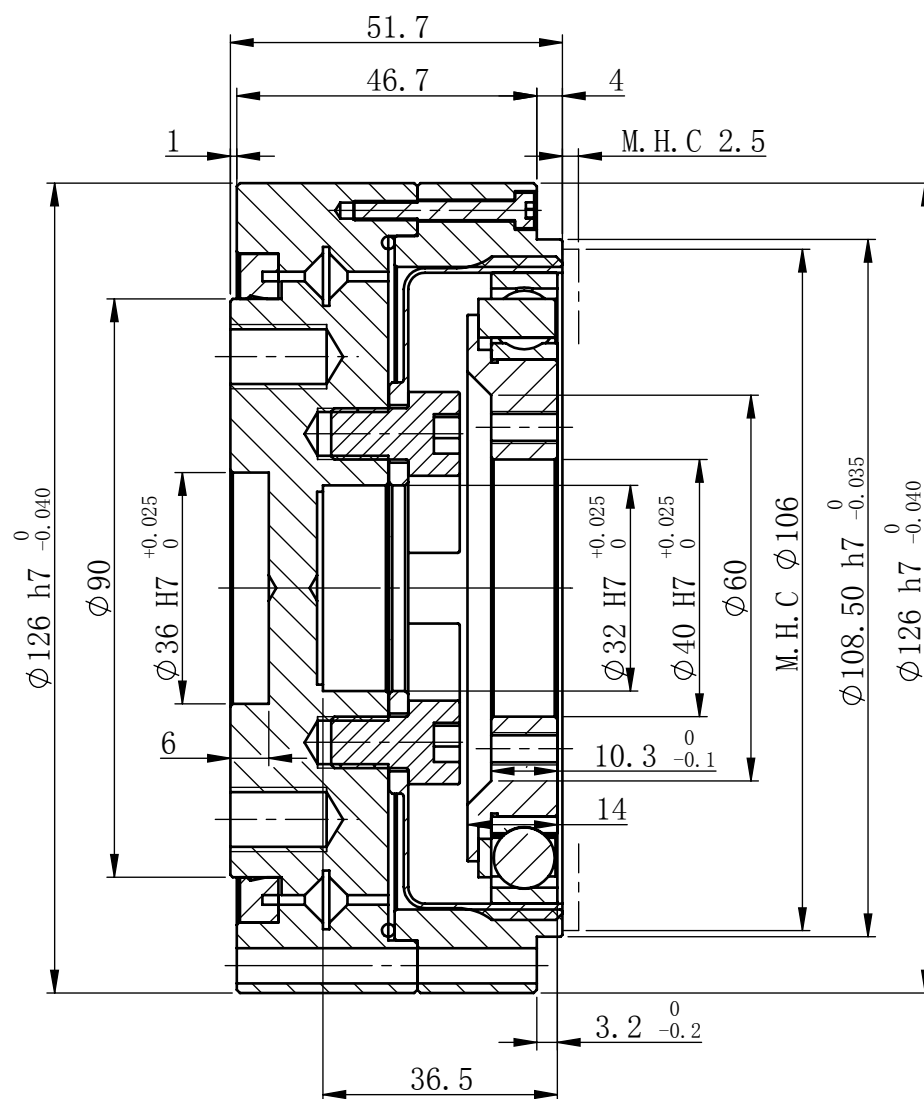


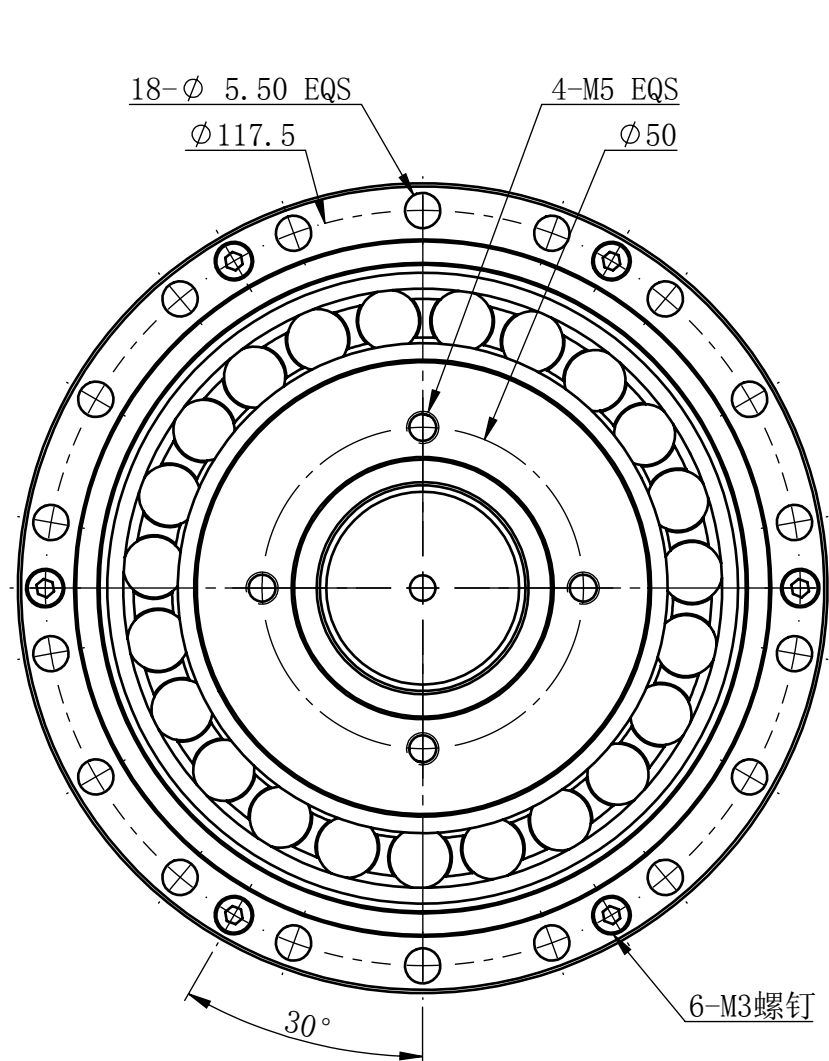

M.H.C:最小安装避让空间 MINIMUM HOUSING CLEARANCE

减速机型号 Model	减速比 Reduc-tion ratio	输入2000r/min时的额定转矩 Rated torque at input 2000r/min		启动停止容许峰值扭矩 Peak torque at start/stop		平均负载转矩容许最大值 Permissible max. value of ave.load torque		瞬间容许最大转矩 Instantaneous permissible max. torque		容许最高输入转速 Permissible max. input rotational speed(r/min)	容许平均输入转速 Permissible ave. input rotational speed(r/min)	齿隙 Backlash	重量 Weight
		Nm	kgfm	Nm	kgfm	Nm	kgfm	Nm	kgfm	润滑脂 Grease lubricant	润滑脂 Grease lubricant	arcsec	kg
FCD-40-50-AJ	50	94	9.6	281	29	137	14	480	49	4000	3000	14	3.6
FCD-40-80-AJ	80	144	15	364	37	198	20	686	70	4000	3000	9	3.6
FCD-40-100-AJ	100	185	19	398	41	260	27	700	71	4000	3000	7	3.6
FCD-40-120-AJ	120	206	21	432	44	315	32	765	78	4000	3000	6	3.6
FCD-40-160-AJ	160	206	21	453	46	316	32	765	78	4000	3000	5	3.6

	图幅 SHEET	页码 PAGE	比例 RATIO	版本 VERSION
	A3	1/1	0.85:1	V1.0

四川天链机器人股份有限公司
Sichuan TLIBOT Co.,Ltd

组合型-超薄小径杯型谐波减速机