



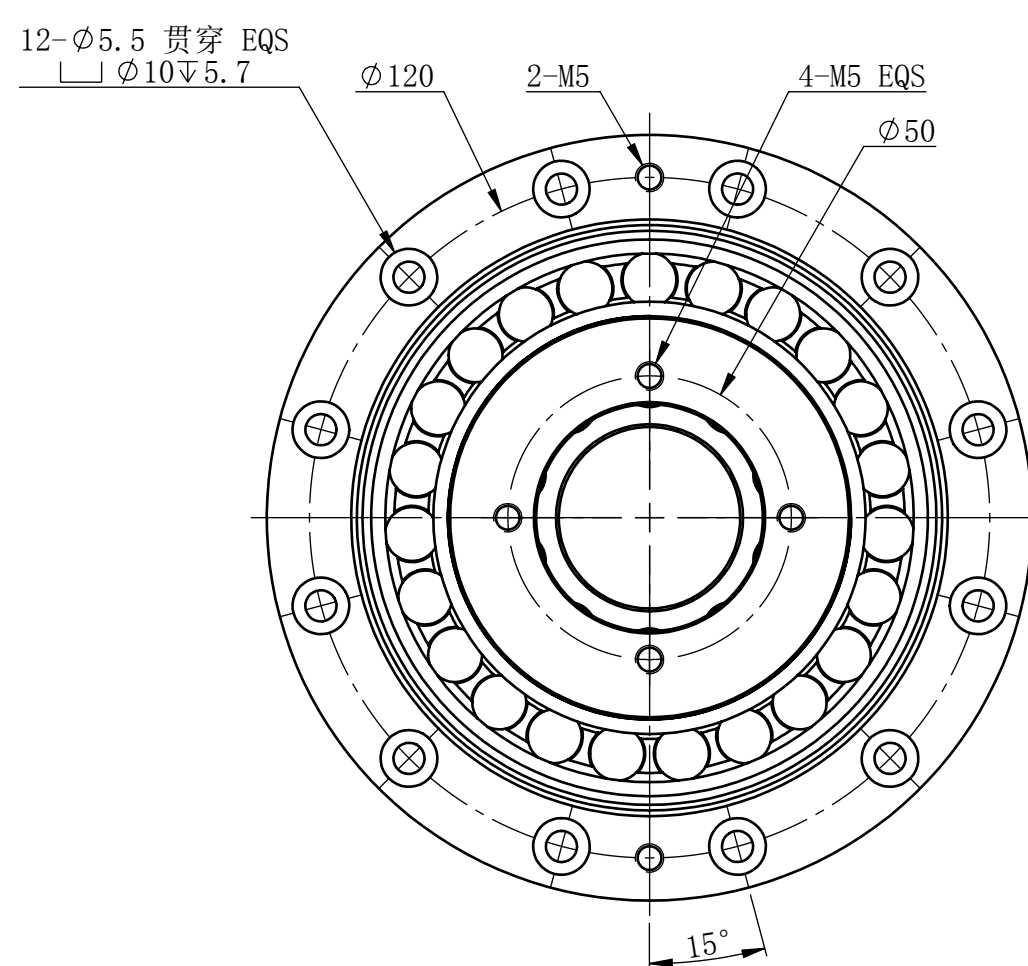

减速机型号 Model	减速比 Reduc-tion ratio	输入2000r/min 时的额定转矩 Rated torque at input 2000r/min		启动停止容许峰值扭矩 Peak torque at start/stop		平均负载转矩容许最大值 Permissible max. value of ave.load torque		瞬间容许最大转矩 Instantaneous permissible max. torque		容许最高输入转速 Permissible max. input rotational speed(r/min)	容许平均输入转速 Permissible ave. input rotational speed(r/min)	齿隙 Backlash	重量 Weight
		Nm	kgfm	Nm	kgfm	Nm	kgfm	Nm	kgfm	润滑脂 Grease lubricant	润滑脂 Grease lubricant	arcsec	kg
FCD-40-50-C	50	94	9.6	281	29	137	14	480	49	4000	3000	14	0.92
FCD-40-80-C	80	144	15	364	37	198	20	686	70	4000	3000	9	0.92
FCD-40-100-C	100	185	19	398	41	260	27	700	71	4000	3000	7	0.92
FCD-40-120-C	120	206	21	432	44	315	32	765	78	4000	3000	6	0.92
FCD-40-160-C	160	206	21	453	46	316	32	765	78	4000	3000	5	0.92

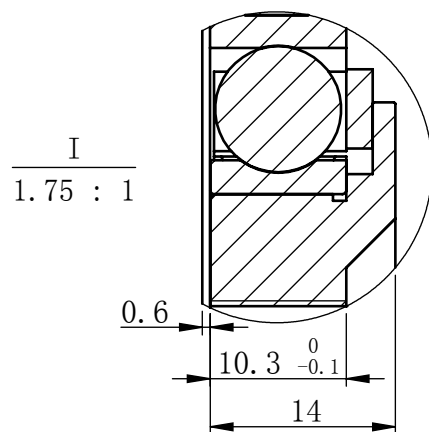

四川天链机器人股份有限公司
Sichuan TLIBOT Co.,Ltd

组件型-超薄杯型谐波减速机