

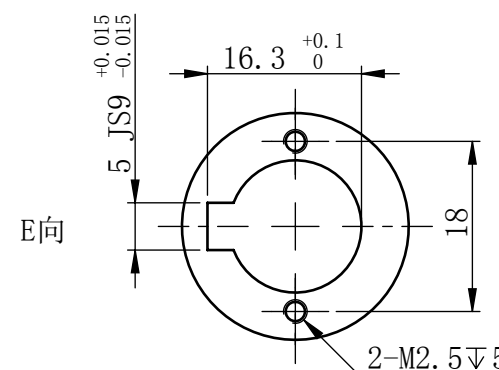
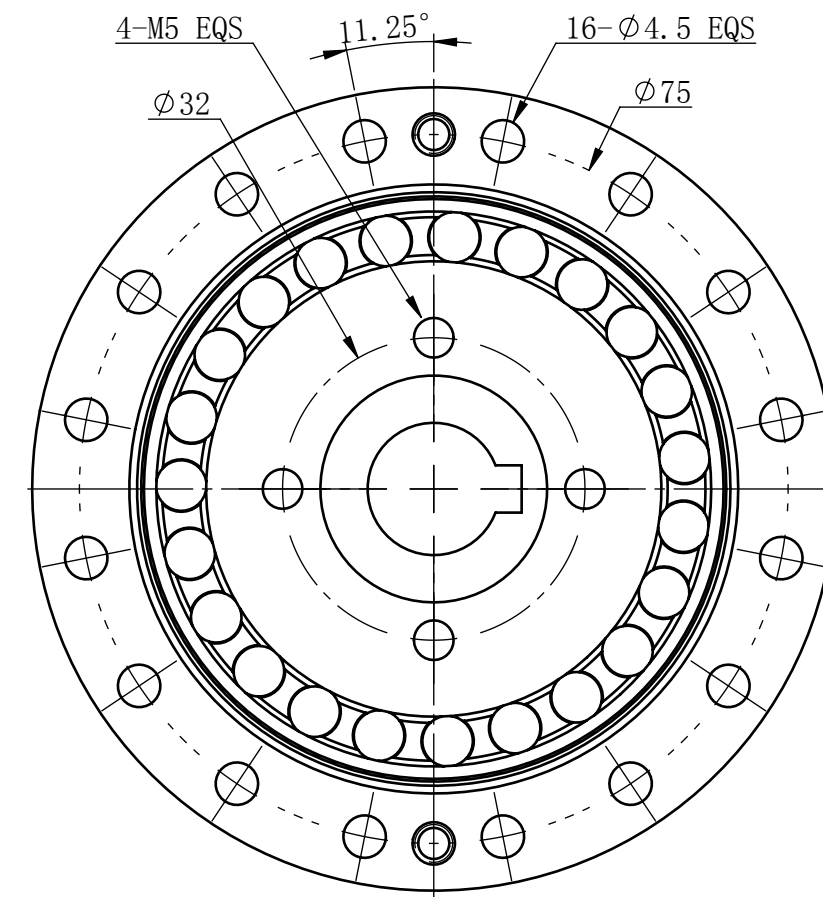
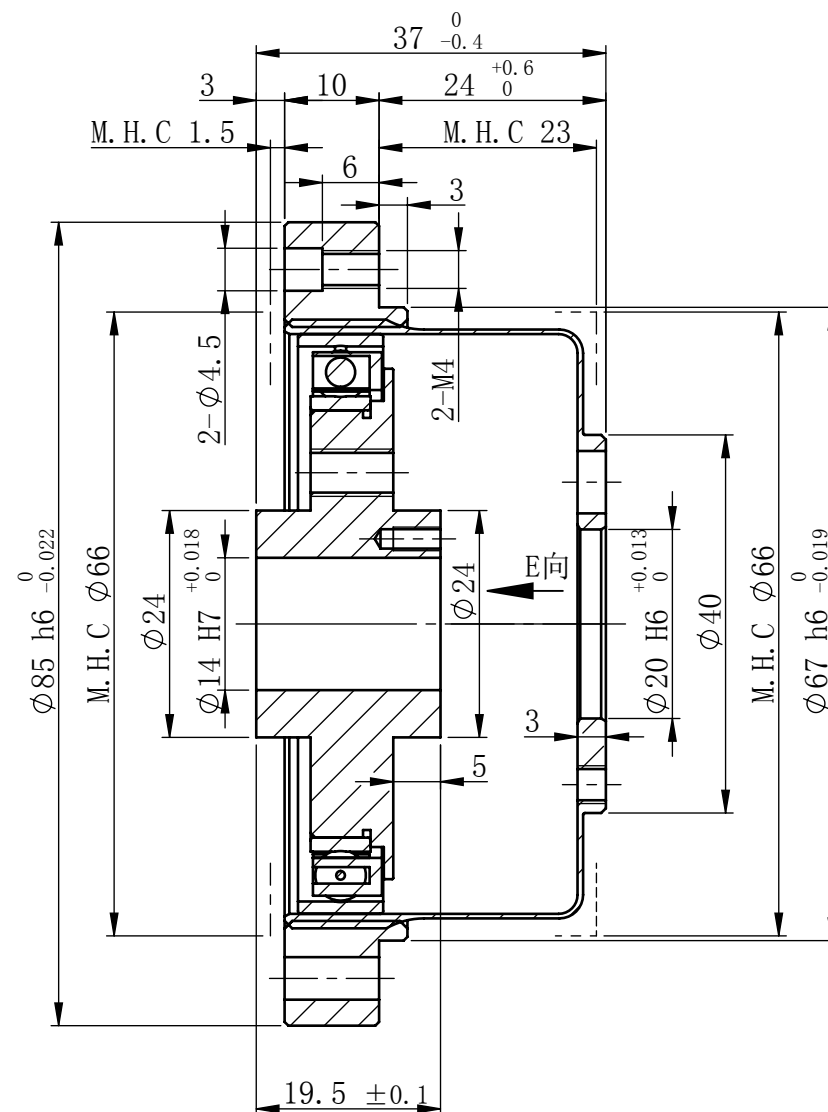


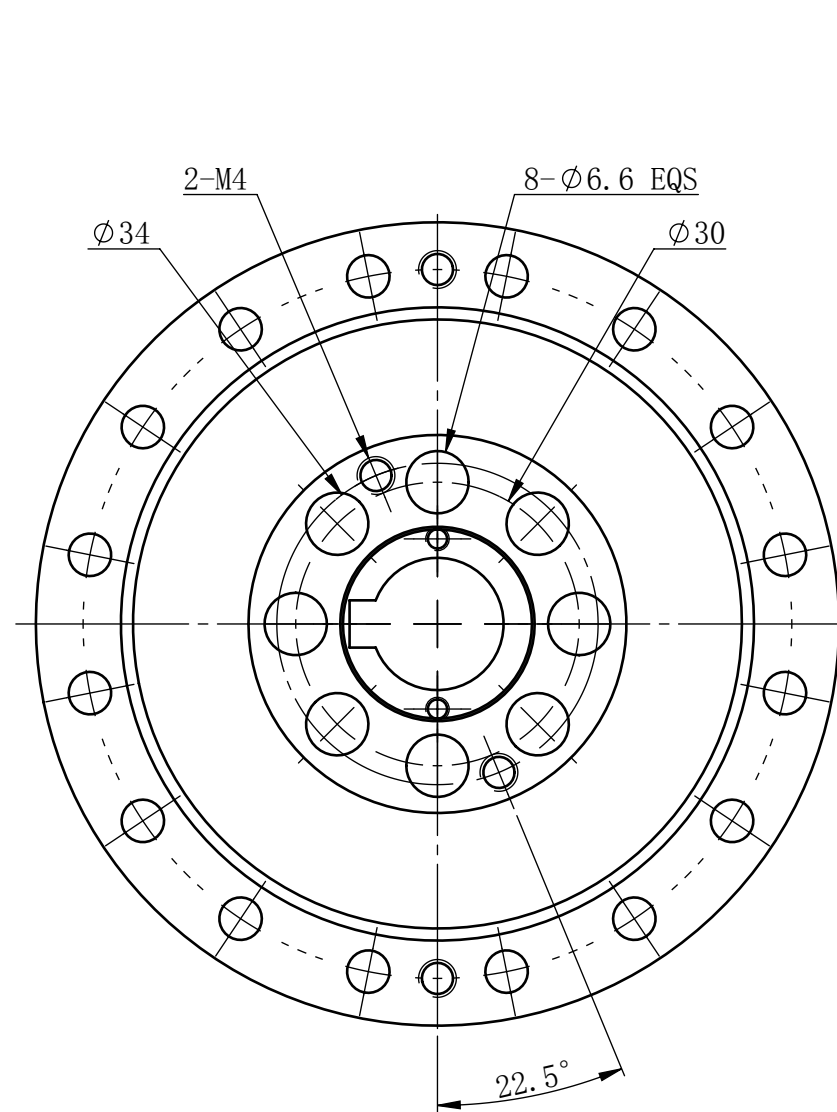

M.H.C:最小安装避让空间 MINIMUM HOUSING CLEARANCE

减速机型号 Model	减速比 Reduction ratio	输入2000r/min时的额定转矩 Rated torque at input 2000r/min		启动停止容许峰值扭矩 Peak torque at start/stop		平均负载转矩容许最大值 Permissible max. value of ave. load torque		瞬间容许最大转矩 Instantaneous permissible max. torque		容许最高输入转速 Permissible max. input rotational speed(r/min)	容许平均输入转速 Permissible ave. input rotational speed(r/min)	齿隙 Backlash	重量 Weight
		Nm	kgfm	Nm	kgfm	Nm	kgfm	Nm	kgfm	润滑脂 Grease lubricant	润滑脂 Grease lubricant	arcsec	kg
FCS-25-30-CJ	30	27	2.8	50	5.1	38	3.9	95	9.7	5600	3500	28	0.42
FCS-25-50-CJ	50	41	4.2	102	10	58	5.9	193	20	5600	3500	17	0.42
FCS-25-80-CJ	80	66	6.8	142	15	91	9	265	27	5600	3500	11	0.42
FCS-25-100-CJ	100	70	7.2	163	17	113	12	295	30	5600	3500	9	0.42
FCS-25-120-CJ	120	70	7.2	174	18	113	12	316	32	5600	3500	8	0.42
FCS-25-160-CJ	160	70	7.2	183	19	113	12	327	33	5600	3500	6	0.42
FCG-25-50-CJ	50	51	5.2	127	13	72	7.3	242	25	5600	3500	17	0.42
FCG-25-80-CJ	80	82	8.4	178	18	113	12	232	24	5600	3500	11	0.42
FCG-25-100-CJ	100	87	8.9	204	21	140	14	369	38	5600	3500	9	0.42
FCG-25-120-CJ	120	87	8.9	217	22	140	14	395	40	5600	3500	8	0.42
FCG-25-160-CJ	160	87	8.9	229	23	140	14	408	42	5600	3500	6	0.42



图幅 SHEET	页码 PAGE	比例 RATIO	版本 VERSION
A3	1/1	1.25:1	V1.0



四川天链机器人股份有限公司
Sichuan TLIBOT Co.,Ltd

组件型-凸轮杯型谐波减速机