

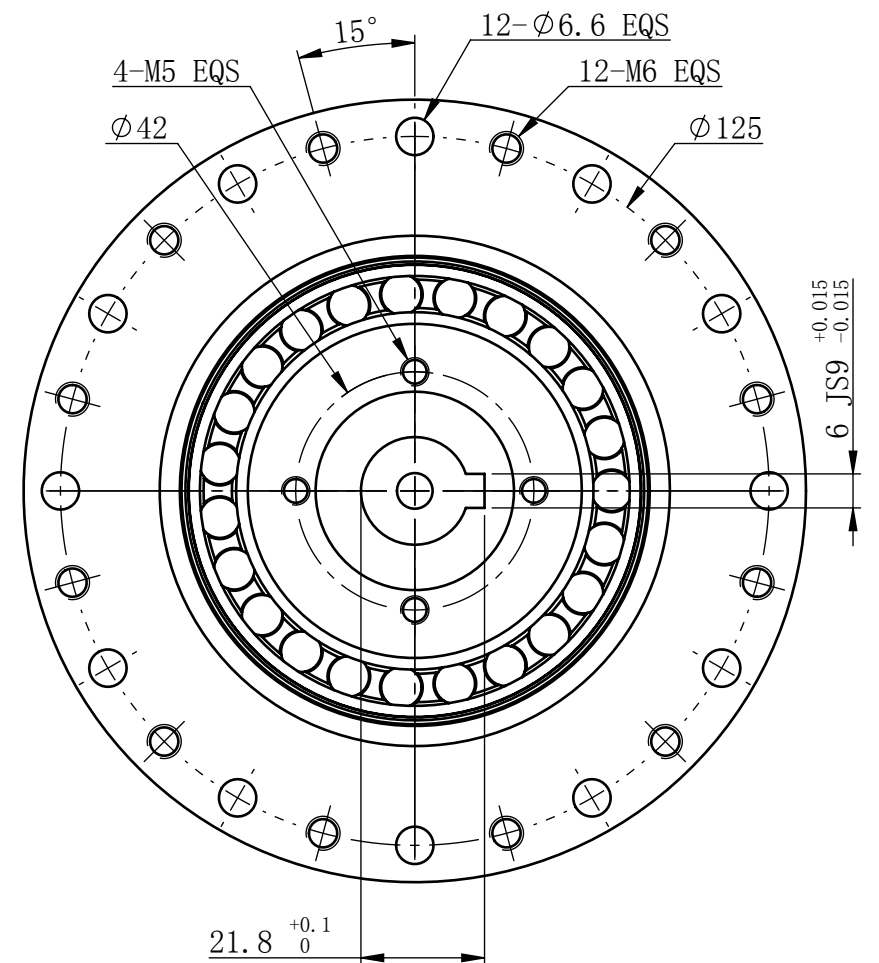
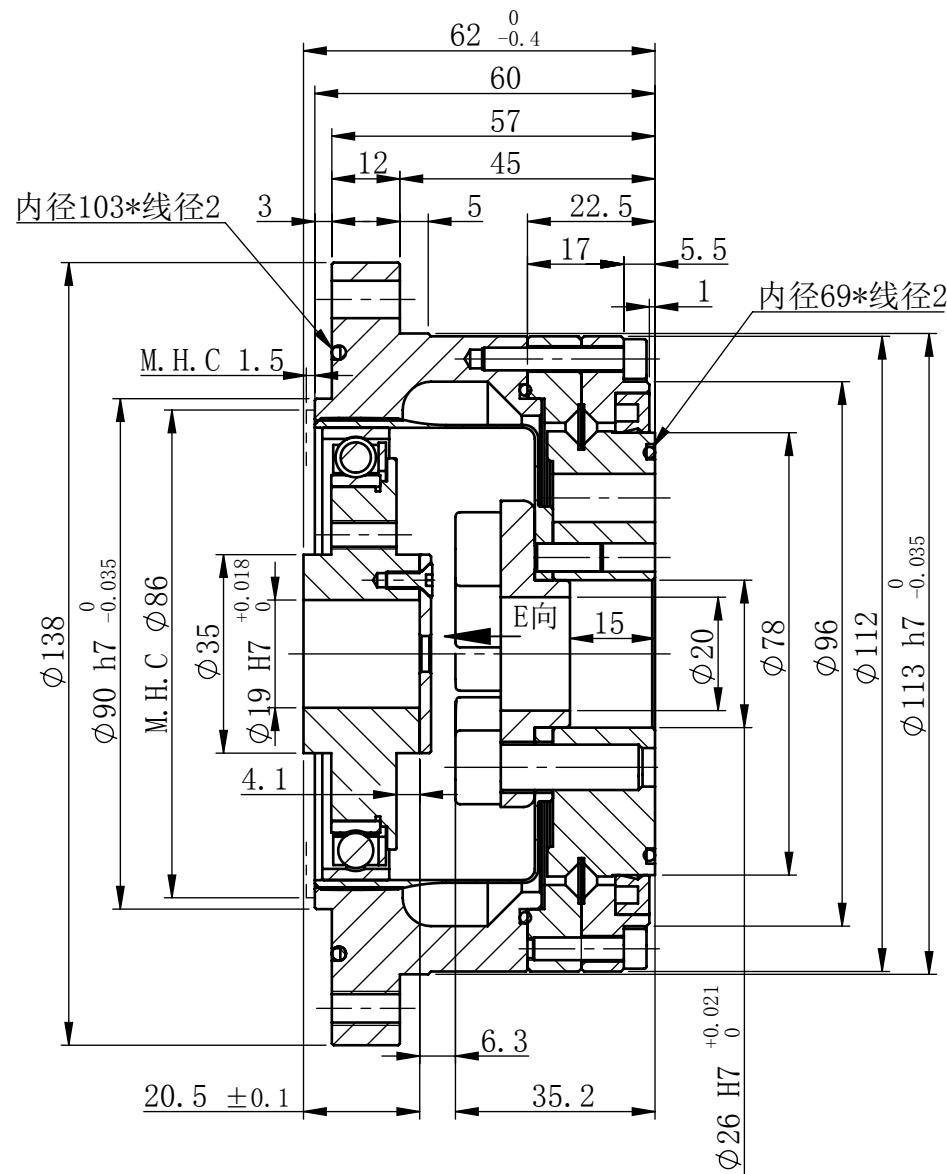
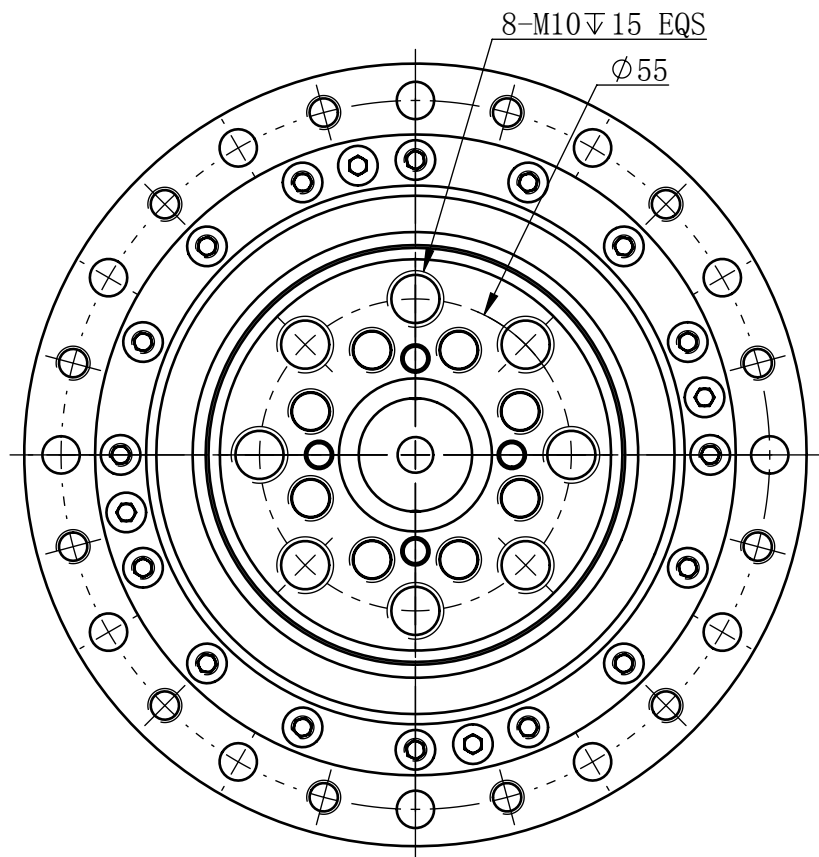




M.H.C:最小安装避让空间 MINIMUM HOUSING CLEARANCE

减速机型号 Model	减速比 Reduction ratio	输入2000r/min时的额定转矩 Rated torque at input 2000r/min		启动停止容许峰值扭矩 Peak torque at start/stop		平均负载转矩容许最大值 Permissible max. value of ave.load torque		瞬间容许最大转矩 Instantaneous permissible max. torque		容许最高输入转速 Permissible max. input rotational speed(r/min)	容许平均输入转速 Permissible ave. input rotational speed(r/min)	齿隙 Backlash	重量 Weight
		Nm	kgfm	Nm	kgfm	Nm	kgfm	Nm	kgfm	润滑脂 Grease lubricant	润滑脂 Grease lubricant	arcsec	kg
FCS-32-30-AJ	30	54	5.5	100	10	75	7.7	200	20	4800	3500	23	3.2
FCS-32-50-AJ	50	80	8.1	225	23	113	12	397	41	4800	3500	14	3.2
FCS-32-80-AJ	80	122	12	316	32	175	18	591	60	4800	3500	9	3.2
FCS-32-100-AJ	100	138	14	346	35	227	23	673	69	4800	3500	7	3.2
FCS-32-120-AJ	120	138	14	367	37	227	23	693	71	4800	3500	6	3.2
FCS-32-160-AJ	160	138	14	388	40	227	23	693	71	4800	3500	5	3.2
FCG-32-50-AJ	50	99	10	281	29	140	14	497	51	4800	3500	14	3.2
FCG-32-80-AJ	80	153	16	395	40	217	22	738	75	4800	3500	9	3.2
FCG-32-100-AJ	100	178	18	433	44	281	29	841	86	4800	3500	7	3.2
FCG-32-120-AJ	120	178	18	459	47	281	29	892	91	4800	3500	6	3.2
FCG-32-160-AJ	160	178	18	484	49	281	29	892	91	4800	3500	5	3.2

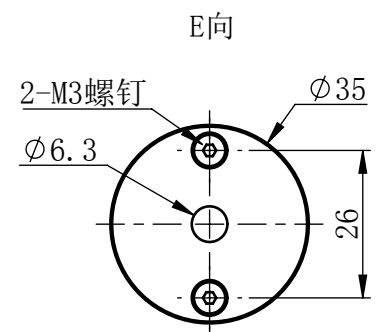

图幅 SHEET	页码 PAGE	比例 RATIO	版本 VERSION
A3	1/1	0.75:1	V1.0



四川天链机器人股份有限公司
 Sichuan TLIBOT Co.,Ltd

组合型-凸轮杯型谐波减速机