




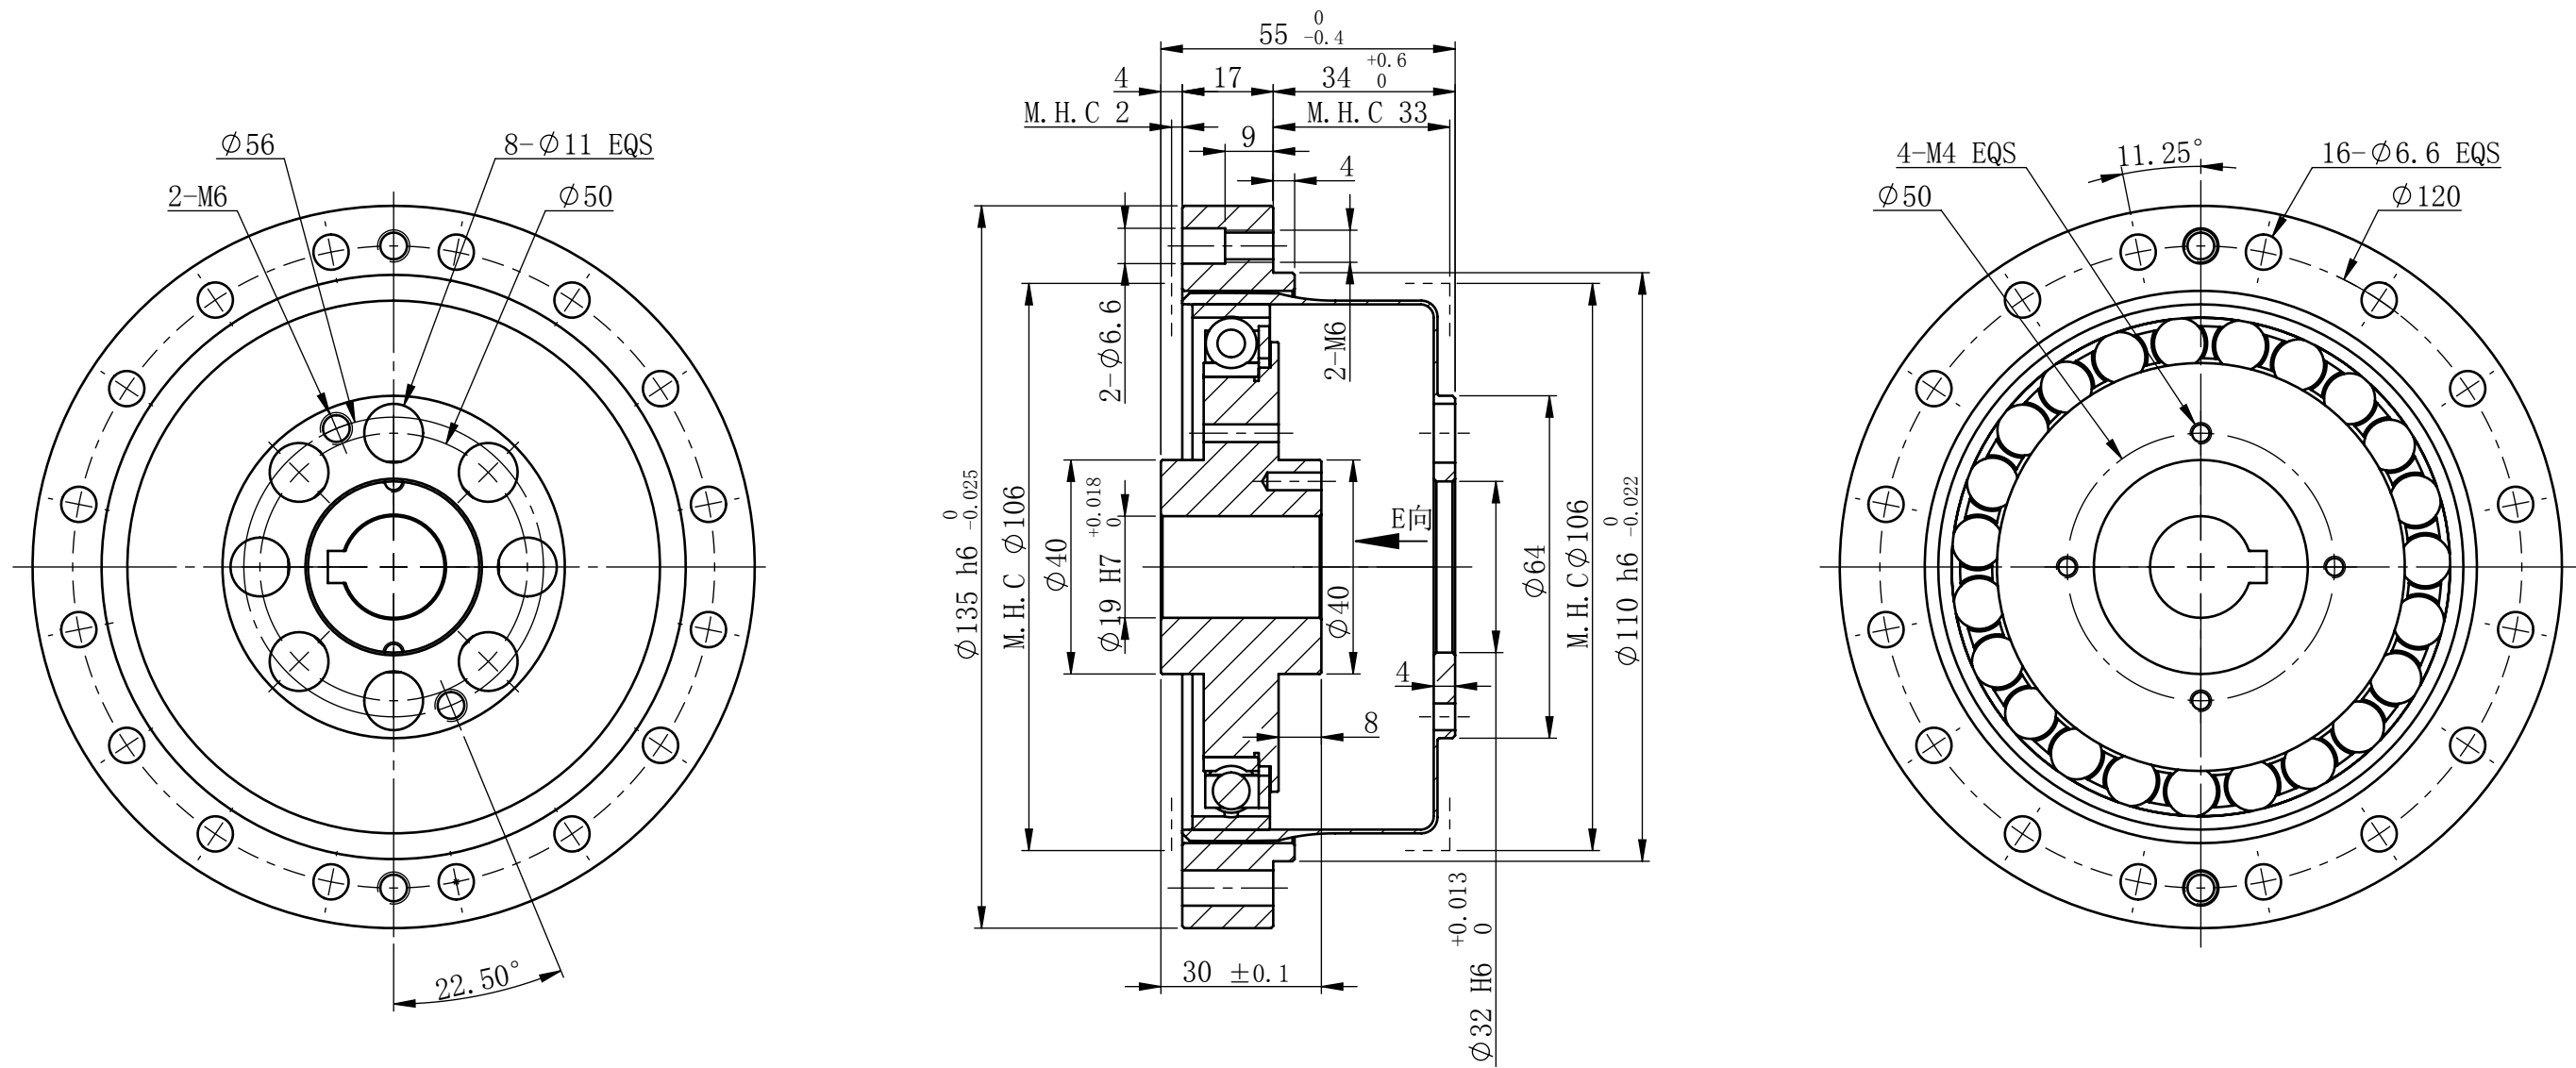

M.H.C:最小安装避让空间 MINIMUM HOUSING CLEARANCE

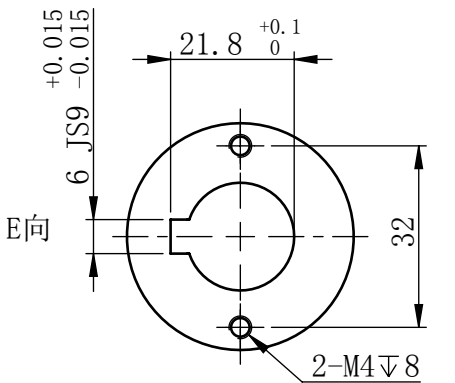

减速机型号 Model	减速比 Reduc-tion ratio	输入2000r/min 时的额定转矩 Rated torque at input 2000r/min		启动停止容许峰值扭矩 Peak torque at start/stop		平均负载转矩容许最大值 Permissible max. value of ave.load torque		瞬间容许最大转矩 Instantaneous permissible max. torque		容许最高输入转速 Permissible max. input rotational speed(r/min)	容许平均输入转速 Permissible ave. input rotational speed(r/min)	齿隙 Backlash	重量 Weight
		Nm	kgfm	Nm	kgfm	Nm	kgfm	Nm	kgfm	润滑脂 Grease lubricant	润滑脂 Grease lubricant	arcsec	kg
FCS-40-50-CJ	50	138	14	406	41	198	20	693	71	4000	3000	14	1.7
FCS-40-80-CJ	80	208	21	524	53	287	29	990	101	4000	3000	9	1.7
FCS-40-100-CJ	100	268	27	574	59	376	38	1091	111	4000	3000	7	1.7
FCS-40-120-CJ	120	297	30	623	64	456	46	1192	122	4000	3000	6	1.7
FCS-40-160-CJ	160	297	30	653	67	456	46	1192	122	4000	3000	5	1.7
FCG-40-50-CJ	50	178	18	523	53	255	26	892	91	4000	3000	14	1.7
FCG-40-80-CJ	80	268	27	675	69	369	38	1270	130	4000	3000	9	1.7
FCG-40-100-CJ	100	345	35	738	75	484	49	1400	143	4000	3000	7	1.7
FCG-40-120-CJ	120	382	39	802	82	586	60	1530	156	4000	3000	6	1.7
FCG-40-160-CJ	160	382	39	841	86	586	60	1530	156	4000	3000	5	V



图幅 SHEET	页码 PAGE	比例 RATIO	版本 VERSION
A3	1/1	0.75:1	V1.0



四川天链机器人股份有限公司
Sichuan TLIBOT Co.,Ltd

组件型-凸轮杯型谐波减速机