

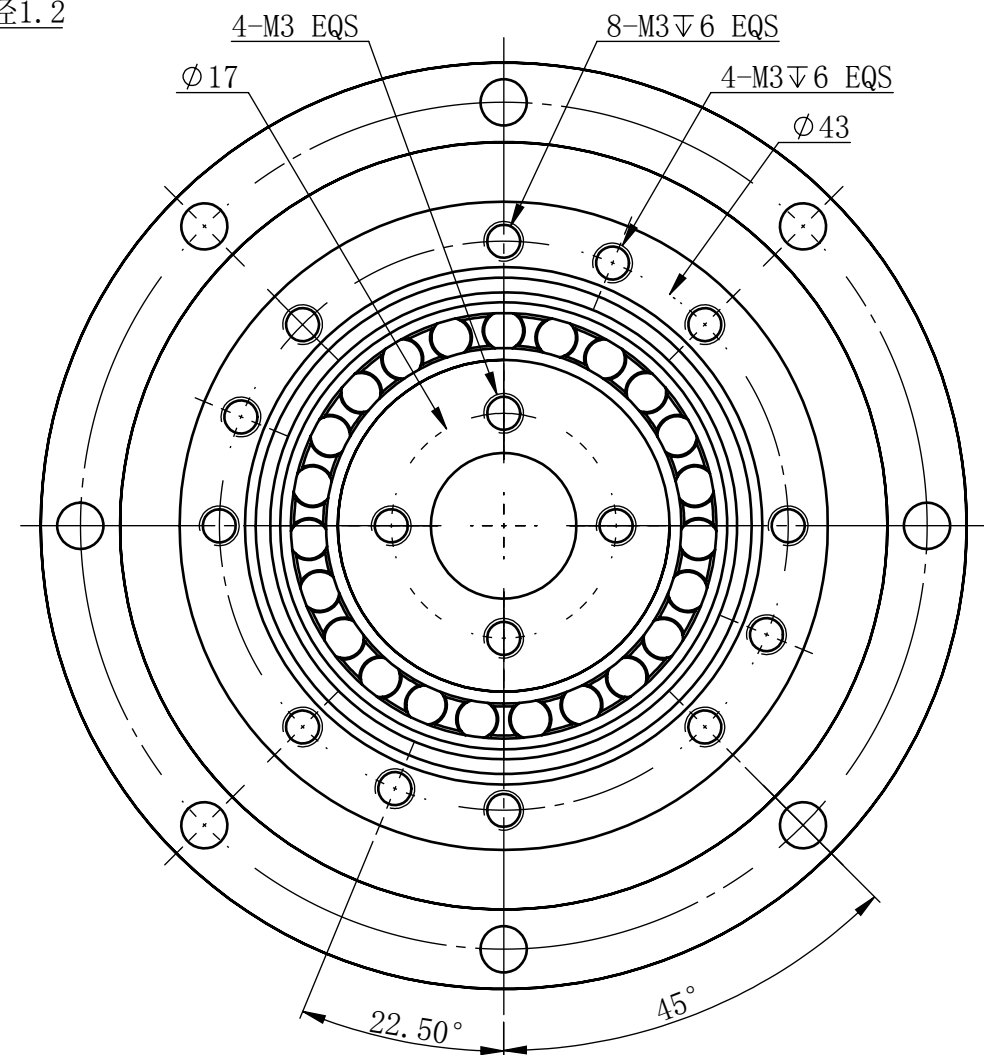


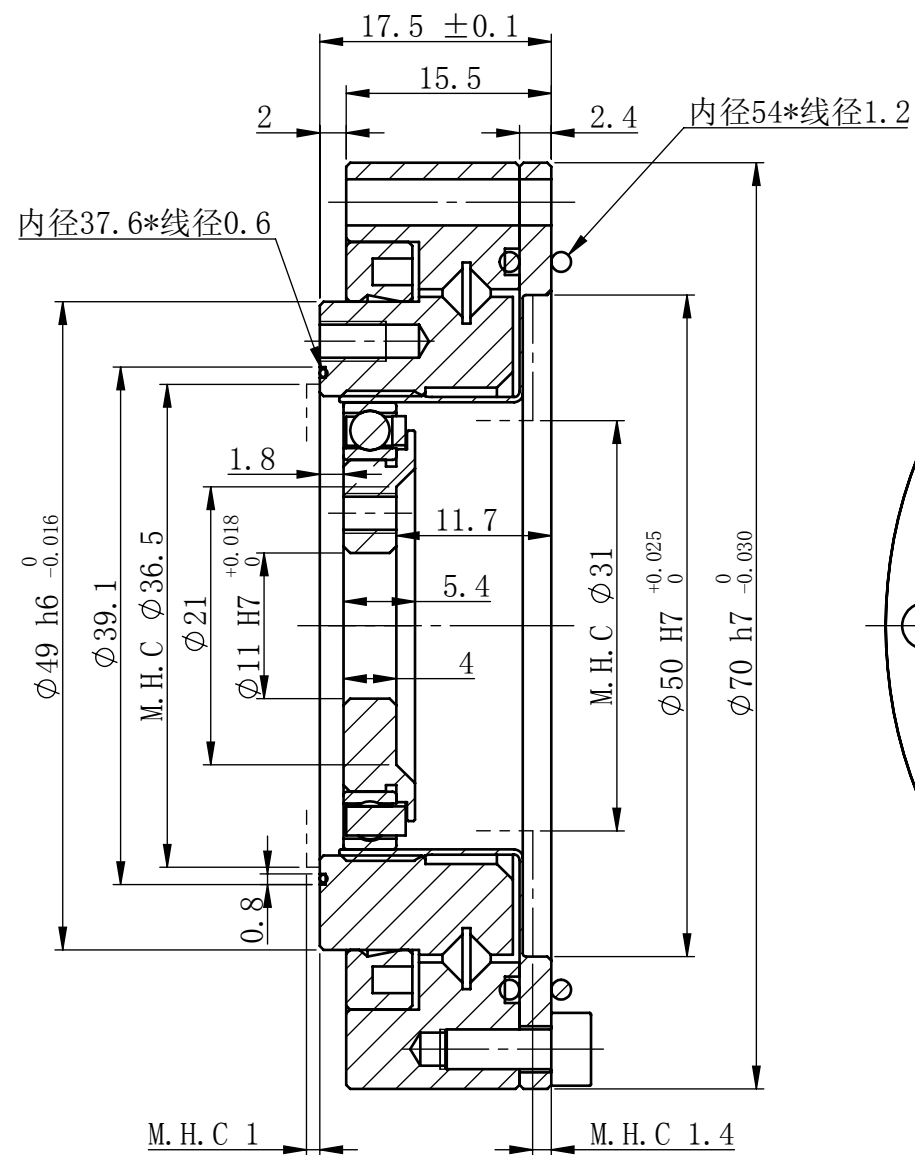

M.H.C :最小安装避让空间 MINIMUM HOUSING CLEARANCE

图幅 SHEET	页码 PAGE	比例 RATIO	版本 VERSION
A3	1/1	1.75:1	V1.0

减速机型号 Model	减速比 Reduc-tion ratio	输入2000r/min时的额定转矩 Rated torque at input 2000r/min		启动停止容许峰值扭矩 Peak torque at start/stop		平均负载转矩容许最大值 Permissible max. value of ave.load torque		瞬间容许最大扭矩 Instantaneous permissible max. torque		容许最高输入转速 Permissible max. input rotational speed(r/min)	容许平均输入转速 Permissible ave. input rotational speed(r/min)	齿隙 Backlash	重量 Weight
		Nm	kgfm	Nm	kgfm	Nm	kgfm	Nm	kgfm	润滑脂 Grease lubricant	润滑脂 Grease lubricant	arcsec	kg
FHD-14-50-SH	50	3.6	0.37	12	1.2	4.8	0.5	24	2.4	8000	3500	36	0.33
FHD-14-80-SH	80	5.2	0.53	16	1.6	7.7	0.8	35	3.6	8000	3500	23	0.33
FHD-14-100-SH	100	5.2	0.53	19	1.9	7.7	0.8	35	3.6	8000	3500	18	0.33

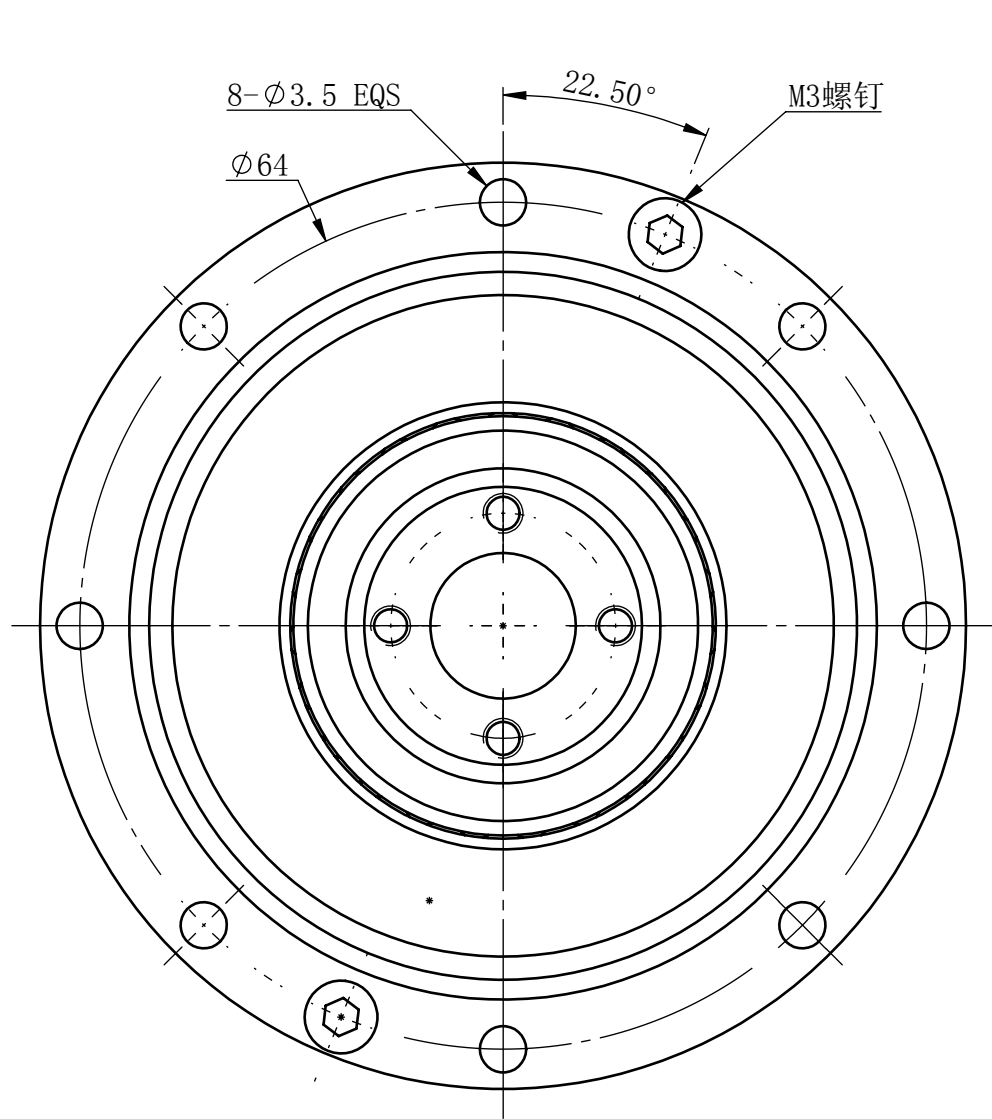

四川天链机器人股份有限公司
Sichuan TLIBOT Co.,Ltd

组合型-超薄简易中空帽型谐波减速机