

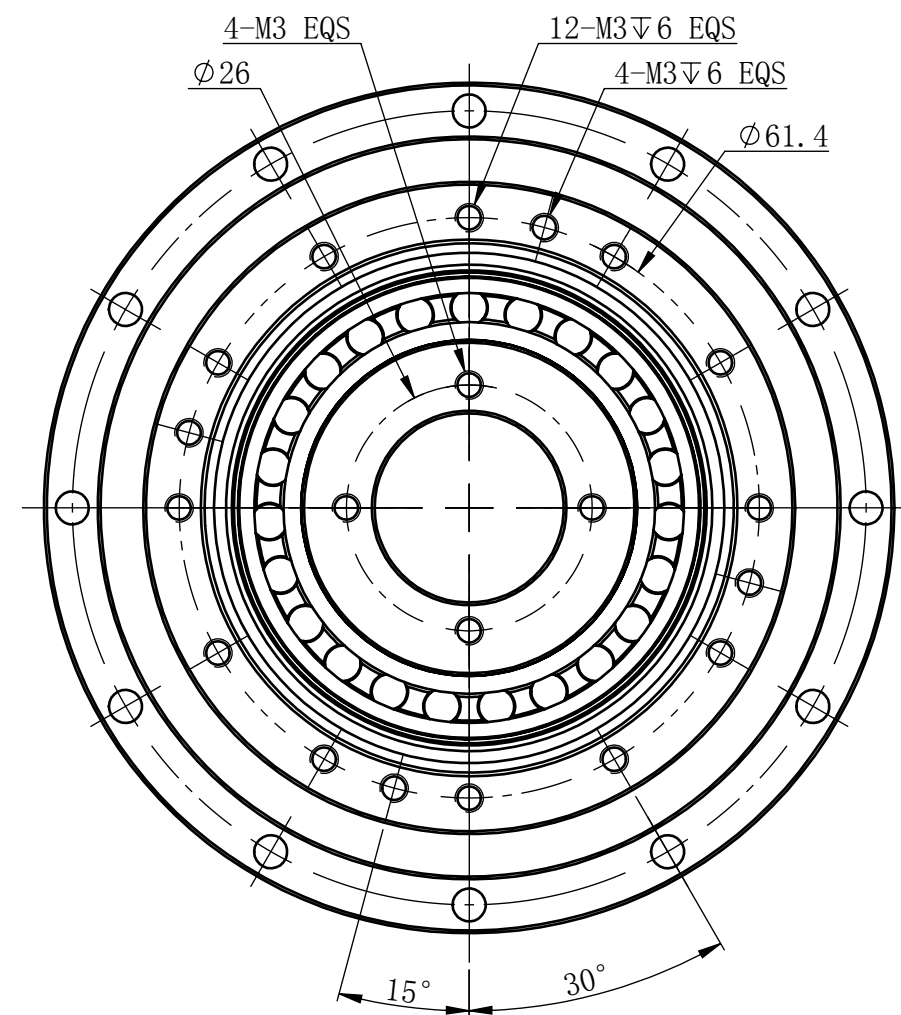
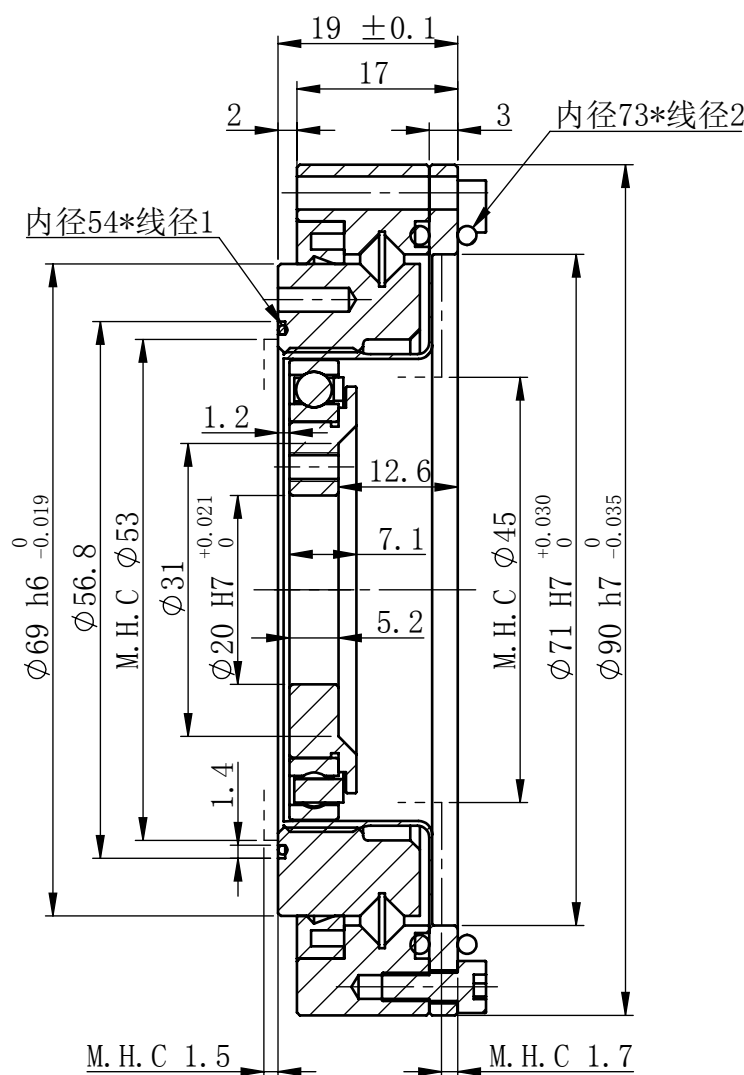


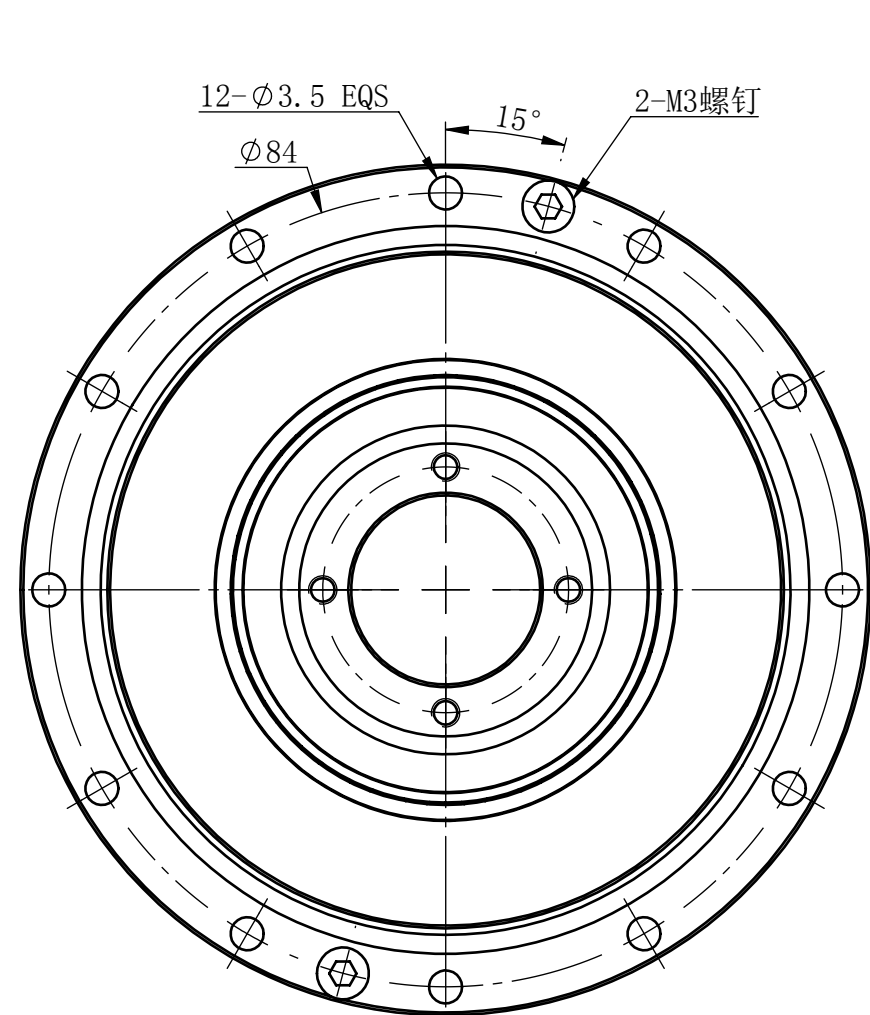

M.H.C:最小安装避让空间 MINIMUM HOUSING CLEARANCE

减速机型号 Model	减速比 Reduc-tion ratio	输入2000r/min时的额定转矩 Rated torque at input 2000r/min		启动停止容许峰值扭矩 Peak torque at start/stop		平均负载转矩容许最大值 Permissible max. value of ave.load torque		瞬间容许最大转矩 Instantaneous permissible max. torque		容许最高输入转速 Permissible max. input rotational speed(r/min)	容许平均输入转速 Permissible ave. input rotational speed(r/min)	齿隙 Backlash	重量 Weight
		Nm	kgfm	Nm	kgfm	Nm	kgfm	Nm	kgfm	润滑脂 Grease lubricant	润滑脂 Grease lubricant	arcsec	kg
FHD-20-50-SH	50	17	1.7	39	4.0	24	2.4	69	7.0	6000	3500	17	0.52
FHD-20-80-SH	80	24	2.4	51	5.2	33	3.4	89	9.1	6000	3500	11	0.52
FHD-20-100-SH	100	27	2.8	57	5.8	33	3.4	93	9.5	6000	3500	9	0.52
FHD-20-120-SH	120	27	2.8	60	6.1	34	3.5	93	9.5	6000	3500	8	0.52
FHD-20-160-SH	160	27	2.8	64	6.5	33	3.4	93	9.5	6000	3500	6	0.52

	图幅 SHEET	页码 PAGE	比例 RATIO	版本 VERSION
	A3	1/1	1.25:1	V1.0



四川天链机器人股份有限公司
Sichuan TLIBOT Co.,Ltd

组合型-超薄简易中空帽型谐波减速机