
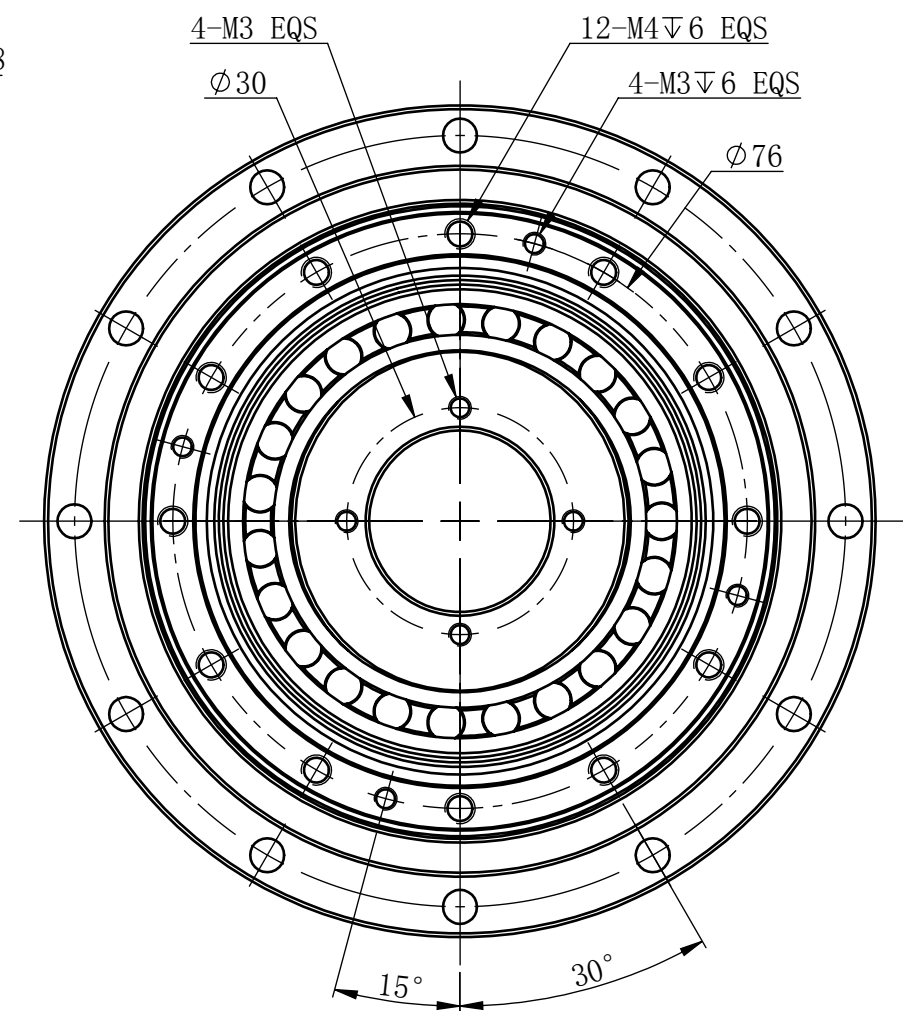
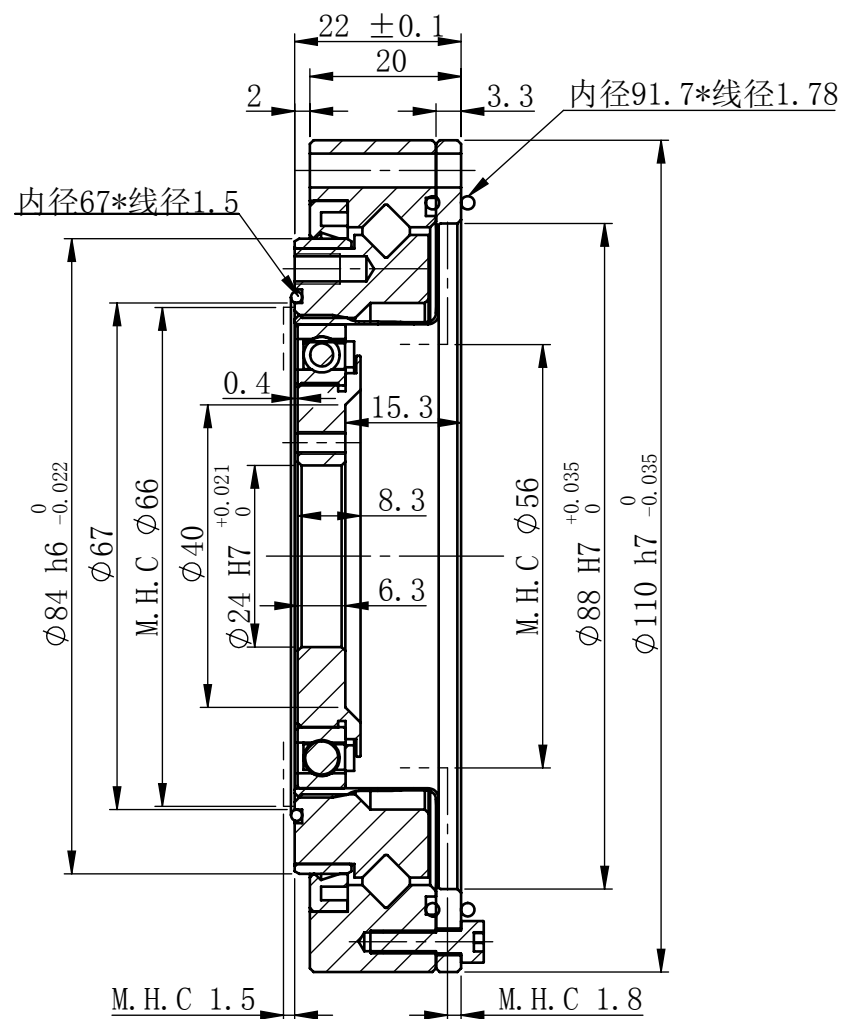


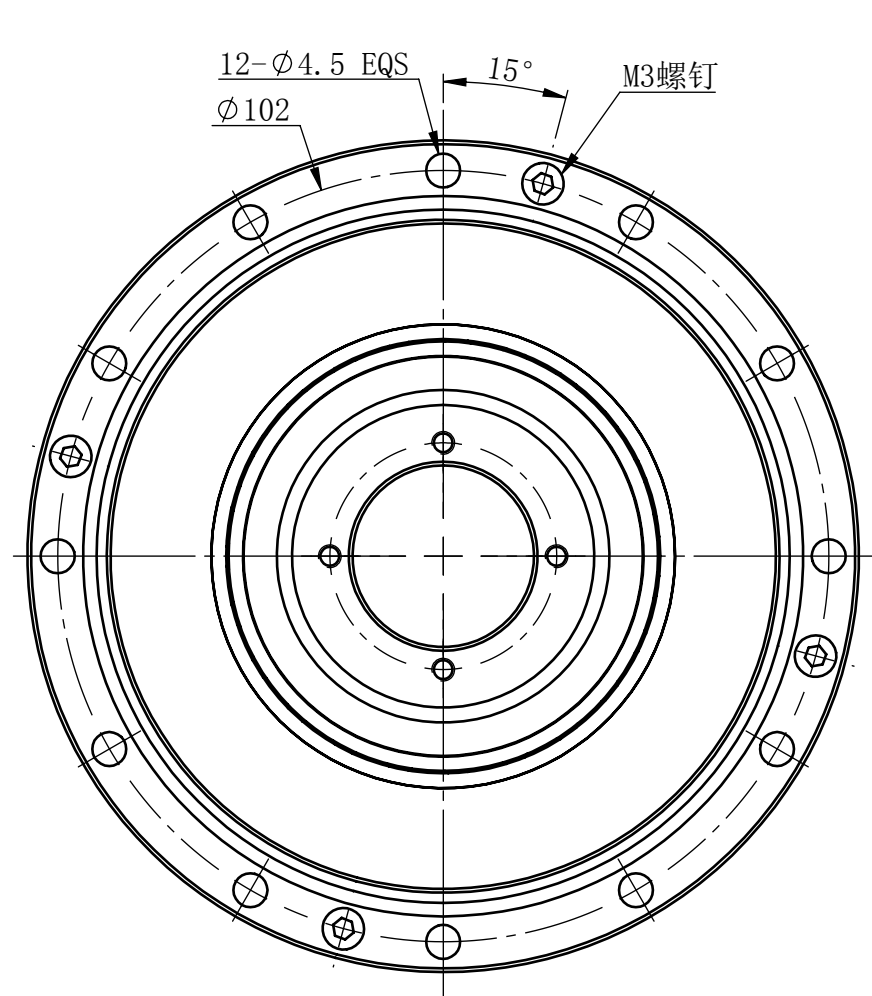

M.H.C:最小安装避让空间 MINIMUM HOUSING CLEARANCE

减速机型号 Model	减速比 Reduction ratio	输入2000r/min时的额定转矩 Rated torque at input 2000r/min		启动停止容许峰值扭矩 Peak torque at start/stop		平均负载转矩容许最大值 Permissible max. value of ave.load torque		瞬间容许最大转矩 Instantaneous permissible max. torque		容许最高输入转速 Permissible max. input rotational speed(r/min)	容许平均输入转速 Permissible ave. input rotational speed(r/min)	齿隙 Backlash	重量 Weight
		Nm	kgfm	Nm	kgfm	Nm	kgfm	Nm	kgfm	润滑脂 Grease lubricant	润滑脂 Grease lubricant	arcsec	kg
FHD-25-50-SH	50	26	2.7	69	7.0	37	3.8	127	13	5500	3500	17	0.91
FHD-25-80-SH	80	43	4.4	96	9.8	60	6.1	179	18	5500	3500	11	0.91
FHD-25-100-SH	100	45	4.6	110	11	74	7.6	184	19	5500	3500	9	0.91
FHD-25-120-SH	120	47	4.8	117	12	75	7.7	204	21	5500	3500	8	0.91
FHD-25-160-SH	160	47	4.8	123	13	74	7.6	204	21	5500	3500	6	0.91

图幅 SHEET	页码 PAGE	比例 RATIO	版本 VERSION
A3	1/1	1:1	V1.0
四川天链机器人股份有限公司 Sichuan TLIBOT Co.,Ltd			
组合型-超薄简易中空帽型谐波减速机			